




HEATING, COOLING & POWER

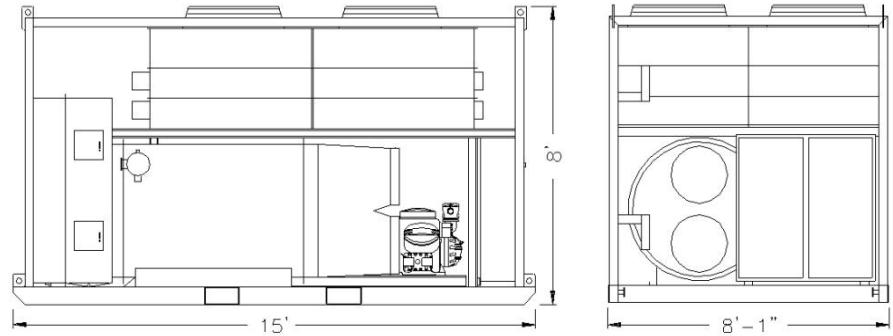

Unit Arrangement - Dimensions are Approximate

## 60 Ton Packaged Air Conditioner

### General Description and Features:

Ready for operation with minimal setup  
 Complete electrical controls  
 Single point power connection  
 Forkliftable with high point pick  
 Filter box (optional)  
 Hot gas bypass

### Equipment Data:

Model NTIA-60

### Shipping Data:

Shipping Weight 11,000 lbs  
 Dimensions 15' L x 8'-1" W x 8'-6" H  
 Leveling Required Within 1" per 8 ft.  
 Installed Clearances 6' (condenser), 4' (electrical)

### Mechanical Data:

Air Flow 13,500 cfm @ 3.5" ESP  
 Supply Air Duct (2) 20"  
 Return Air Duct NA  
 Filter Box (option)  
 Circuits / Compressors 1 / 1  
 Refrigerant / Charge R-22 / 125 lbs  
 Oil / Charge Mineral Oil

### Electrical Data:

**Single Disconnect**  
 Voltage 460 V / 3 phase / 60 hertz  
 Disconnect Size 200 amps  
 Connection Leviton Series 16 Camlock  
 Cables 1/0 - (1) Set, (1) Ground  
 FLA / MCA Cooling 135 / 160 amps

### Performance Data:

Cooling Air	13,500 cfm	8,000 cfm 95°Fdb/78°Fwb to 55°F @3.75" esp
	Inlet 95°F DB / 78°F DB	13,500 cfm 80°Fdb/67°Fwb to 55°F @3.5" esp
	Outlet 55°F saturated	18,000 cfm 75°Fdb/62°Fwb to 53°F @1.5" esp

**NATIONAL EMERGENCY 24/7 SERVICE**

**RENTAL & SALES (877) 457-9400**

www.unitedmhc.com